


## Builder's Cladding Location and Gerard Roof Flashings Guide

Gerard Roofs pressed steel tiles are installed using proprietary flashings, covering the lower sections of the Gerard flashings with cladding is an incorrect application. Refer to the below drawings which show the correct location and incorrect locations for the cladding.

### Correct cladding location

The location above the step of a Gerard flashing is important. The lower edge of the flashing should be installed 5 mm (approximately) above the step in the Gerard flashing.

This allows tiles to be inserted behind the flashings and for future maintenance of the lower edge of the claddings.

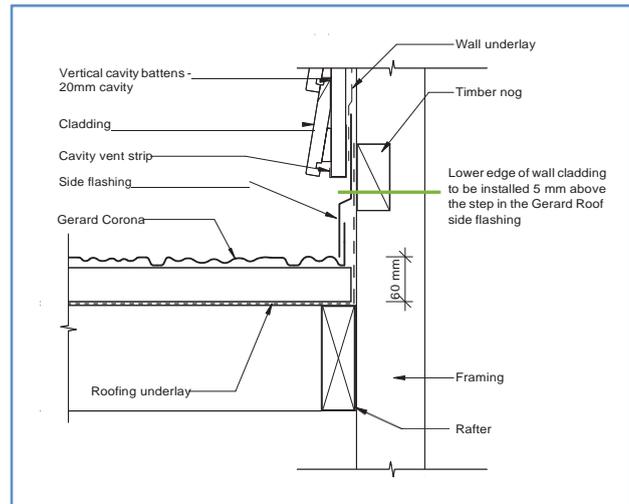

### Incorrect cladding positioning

Positioning as shown is **not suitable for installing any cladding** over a pressed metal tile flashing.

